

Jindara®

WOODHEATING



10 YEAR FIREBOX
WARRANTY



QUALITY THROUGH INTEGRITY



JINDARA WOODHEATING

QUALITY THROUGH INTEGRITY



Jindara Woodheating has been a key player in the Australian Woodheating industry for over 25 years. While many major brands have begun to source components and move production overseas, Jindara has consolidated its reputation as 100% Australian made and manufactured product by expanding its range of high quality woodheaters. Jindara have sought to continue to provide Australian families with a vibrant heat source that can be counted upon during the peak of winter.

Our expansive range covers styles to suit every home from traditional flat and bay window, to modernised / minimalistic woodheaters and dual-door heating options. Jindara also provides you with a range of installation options using our Zero Clearance Cabinets and Through-Wall Kits.

When you purchase a Jindara, you are investing in a high-quality Australian made product that is built to last under Australian conditions and you can rest assured in the knowledge your purchase is backed up by industry-leading after sales service and support. At Jindara, we believe that quality comes through integrity.



CONTENTS

MADE IN AUSTRALIA	3	DUAL-DOOR RANGE	12-13
OUTBACK SERIES	4-7	ZERO CLEARANCE & ELEVATED	14
PARAMOUNT SERIES	8-9	INSTALLATION	
PLATINUM SERIES	10-11	SPECIFICATIONS	15-16

JINDARA WOODHEATING

MADE IN AUSTRALIA

OUTBACK SERIES

The diversity offered by the Outback Series means that there is a model to suit every application in home heating. The range includes tried and tested models that have been a constant and reliable heat source for many Australian families for generations. From tall and easy to load flat window freestanding models, to the elegance of the bay window models - you can be sure there is a style to suit your needs.

PARAMOUNT SERIES

The Paramount Series has been the cornerstone of Jindara Woodheating for many years and for good reason. These cast-iron lined woodheaters with a simple traditional design can be trusted to keep your home warm on even the coldest of winter nights, year after year.

PLATINUM SERIES

Looking for something that is both visually striking and hard working? Look no further than the Jindara Platinum Series. These woodheaters will not only provide an elegant centrepiece for your living space all year round, they will ensure your house has a warm and cosy feel to it so you can relax in comfort.

DUAL-DOOR RANGE

The Jindara Dual-Door Range gives you a variety of options in terms of size and style. The substantial heating capacity of the Duplicity is contrasted by the smaller Duo which is great for smaller homes. The pinnacle of woodheater design is showcased in the stunning Spectre models, which will provide gorgeous views of flickering flames to two areas of your home.



DID YOU KNOW?

Research conducted by the CSIRO found that firewood produces less greenhouse gas than all other domestic heating options. Australia's environmental standards relating to woodheating are the strictest in the world. This means burning wood in the modern efficient woodheaters provided by Jindara will produce less carbon than if the wood was left to naturally decompose on forest floor.*

*2003 CSIRO Study: Life Cycle Assessment of Greenhouse Gas Emissions from Domestic Woodheating

JINDARA WOODHEATING

OUTBACK SERIES - FREESTANDING



RIVERINA

- ✓ 3-SPEED FAN
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ TALL PEDESTAL FOR EASY LOADING



CAPACITY
180m²



LOG LENGTH
340mm



FLUE SIZE
150mm



OUTPUT
14kW[±]



EFFICIENCY
69%⁺



EMISSIONS
0.9 g/kg



BAROSSA

- ✓ 3-SPEED FAN
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ TALL PEDESTAL FOR EASY LOADING



CAPACITY
260m²



LOG LENGTH
410mm



FLUE SIZE
150mm



OUTPUT
21kW[±]



EFFICIENCY
72%⁺



EMISSIONS
1.4 g/kg



BARWON

- ✓ 3-SPEED FAN
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ TALL PEDESTAL FOR EASY LOADING



CAPACITY
320m²



LOG LENGTH
410mm



FLUE SIZE
175mm



OUTPUT
24kW[±]



EFFICIENCY
65%⁺



EMISSIONS
1.3 g/kg

JINDARA WOODHEATING

OUTBACK SERIES - FREESTANDING



SORRENTO

- ✓ 3-SPEED FAN
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ DUAL PRE-HEATED PRIMARY AIR
- ✓ COOL-TOUCH CASING



EFFICIENCY
73%+



EMISSIONS
1.0 g/kg



CAPACITY
220m²



LOG LENGTH
450mm



FLUE SIZE
150mm



OUTPUT
15kW[±]



PYRENEES

- ✓ 3-SPEED FAN
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ DUAL PRE-HEATED PRIMARY AIR
- ✓ COOL-TOUCH CASING



EFFICIENCY
65%+



EMISSIONS
1.3 g/kg



CAPACITY
300m²



LOG LENGTH
450mm



FLUE SIZE
150mm



OUTPUT
17kW[±]



MALLEE

- ✓ 3-SPEED FAN
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ DUAL PRE-HEATED PRIMARY AIR
- ✓ COOL-TOUCH CASING



EFFICIENCY
64%+



EMISSIONS
2.4 g/kg



CAPACITY
350m²



LOG LENGTH
480mm



FLUE SIZE
175mm



OUTPUT
22kW[±]

JINDARA WOODHEATING

OUTBACK SERIES - FREESTANDING



STURT

- ✓ BOIL & SIMMER ON TOP OR BACK SHELF
- ✓ FIREBRICK LINED
- ✓ EXTRA DEEP FIREBOX FOR EASY LOADING
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ OPTIONAL 3-SPEED FAN



EFFICIENCY
69%+



EMISSIONS
1.1 g/kg



CAPACITY
180m²



LOG LENGTH
480mm



FLUE SIZE
150mm



OUTPUT
16kW[±]



COTTAGE

- ✓ HOT PLATE FOR BOILING / SIMMERING
- ✓ OVEN FOR BAKING
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE



EFFICIENCY
N/A



EMISSIONS
N/A



CAPACITY
120m²



LOG LENGTH
340mm



FLUE SIZE
150mm



OUTPUT
N/A



HOMESTEAD

- ✓ 3-SPEED FAN
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ LARGE WOOD STORAGE BOX
- ✓ TALL UNIT & EASY TO LOAD
- ✓ IDENTICAL FIREBOX TO RIVERINA
- ✓ 10 YEAR FIREBOX WARRANTY



EFFICIENCY
69%+



EMISSIONS
0.9 g/kg



CAPACITY
180m²



LOG LENGTH
340mm



FLUE SIZE
150mm



OUTPUT
14kW[±]

JINDARA WOODHEATING

OUTBACK SERIES - INSERT



RIVERINA

- ✓ 3-SPEED FAN
 - ✓ FIREBRICK LINED
 - ✓ 8mm STEEL BAFFLE PLATE
 - ✓ 10 YEAR FIREBOX WARRANTY
 - ✓ ZERO CLEARANCE
- COMPATIBLE, SEE PAGE 14
FOR MORE INFORMATION



EFFICIENCY
72%+



EMISSIONS
0.9 g/kg



CAPACITY
160m²



LOG LENGTH
340mm



FLUE SIZE
150mm



OUTPUT
14kW[±]



BAROSSA

- ✓ 3-SPEED FAN
 - ✓ FIREBRICK LINED
 - ✓ 8mm STEEL BAFFLE PLATE
 - ✓ 10 YEAR FIREBOX WARRANTY
 - ✓ ZERO CLEARANCE
- COMPATIBLE, SEE PAGE 14
FOR MORE INFORMATION



EFFICIENCY
67%+



EMISSIONS
1.5 g/kg



CAPACITY
240m²



LOG LENGTH
410mm



FLUE SIZE
150mm



OUTPUT
17kW[±]



BARWON

- ✓ 3-SPEED FAN
 - ✓ FIREBRICK LINED
 - ✓ 8mm STEEL BAFFLE PLATE
 - ✓ 10 YEAR FIREBOX WARRANTY
 - ✓ ZERO CLEARANCE
- COMPATIBLE, SEE PAGE 14
FOR MORE INFORMATION



EFFICIENCY
65%+



EMISSIONS
1.4 g/kg



CAPACITY
280m²



LOG LENGTH
410mm



FLUE SIZE
175mm



OUTPUT
21kW[±]

JINDARA WOODHEATING

PARAMOUNT SERIES - FREESTANDING



PILBARA

- ✓ 3-SPEED FAN
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY



CAPACITY
120m²



LOG LENGTH
310mm



FLUE SIZE
150mm



OUTPUT
6kW[±]



EFFICIENCY
66%⁺



EMISSIONS
2.2 g/kg



KIMBERLEY

- ✓ 3-SPEED FAN
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ MINIMAL CLEARANCES



CAPACITY
240m²



LOG LENGTH
420mm



FLUE SIZE
150mm



OUTPUT
13kW[±]



EFFICIENCY
69%⁺



EMISSIONS
1.0 g/kg



HAMERSLEY

- ✓ 3-SPEED FAN
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY



CAPACITY
300m²



LOG LENGTH
420mm



FLUE SIZE
150mm



OUTPUT
18kW[±]



EFFICIENCY
64%⁺



EMISSIONS
2.2 g/kg

JINDARA WOODHEATING

PARAMOUNT SERIES - INSERT



KIMBERLEY

- ✓ 3-SPEED FAN
 - ✓ CAST IRON LINED
 - ✓ 8mm STEEL BAFFLE PLATE
 - ✓ 10 YEAR FIREBOX WARRANTY
 - ✓ ZERO CLEARANCE
- COMPATIBLE, SEE PAGE 14
FOR MORE INFORMATION



EFFICIENCY
65%+



EMISSIONS
0.3 g/kg



CAPACITY
220m²



LOG LENGTH
310mm



FLUE SIZE
150mm



OUTPUT
12kW±



HAMERSLEY

- ✓ 3-SPEED FAN
 - ✓ CAST IRON LINED
 - ✓ 8mm STEEL BAFFLE PLATE
 - ✓ 10 YEAR FIREBOX WARRANTY
 - ✓ ZERO CLEARANCE
- COMPATIBLE, SEE PAGE 14
FOR MORE INFORMATION



EFFICIENCY
60%+



EMISSIONS
1.4 g/kg



CAPACITY
260m²



LOG LENGTH
420mm



FLUE SIZE
150mm



OUTPUT
16kW±



FEDERATION

- ✓ 3-SPEED FAN
 - ✓ CAST IRON LINED
 - ✓ 8mm STEEL BAFFLE PLATE
 - ✓ 10 YEAR FIREBOX WARRANTY
 - ✓ ALLOY FASCIA & TIMBER MANTLE OPTION
 - ✓ ZERO CLEARANCE
- COMPATIBLE, SEE PAGE 14
FOR MORE INFORMATION



EFFICIENCY
60%+



EMISSIONS
1.4 g/kg



CAPACITY
260m²



LOG LENGTH
420mm



FLUE SIZE
150mm



OUTPUT
16kW±

JINDARA WOODHEATING

PLATINUM SERIES - FREESTANDING & MODULAR



TILGA FREESTANDING

- ✓ SLEEK & MODERN DESIGN
- ✓ 3-SPEED FAN
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ DUAL PRE-HEATED PRIMARY AIR
- ✓ DUAL-ACTION HANDLE LATCH
- ✓ THERMOSTATIC FAN CONTROL



CAPACITY
260m²



LOG LENGTH
410mm



FLUE SIZE
150mm



EFFICIENCY
80%+



EMISSIONS
0.9 g/kg

GRANGE FREESTANDING

- ✓ SLEEK & MODERN DESIGN
- ✓ 3-SPEED FAN
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ DUAL PRE-HEATED PRIMARY AIR
- ✓ DUAL-ACTION HANDLE LATCH
- ✓ THERMOSTATIC FAN CONTROL



CAPACITY
330m²



LOG LENGTH
410mm



FLUE SIZE
150mm



EFFICIENCY
76%+



EMISSIONS
1.3 g/kg

TILGA MODULAR

- ✓ SLEEK & MODERN DESIGN
- ✓ 1200mm BENCH OPTION
- ✓ 3-SPEED FAN
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ HIGH EFFICIENCY, LOW EMISSIONS
- ✓ THERMOSTATIC FAN CONTROL



CAPACITY
260m²



LOG LENGTH
410mm



FLUE SIZE
150mm



EFFICIENCY
80%+



EMISSIONS
0.9 g/kg

GRANGE MODULAR

- ✓ SLEEK & MODERN DESIGN
- ✓ 1200mm BENCH OPTION
- ✓ 3-SPEED FAN
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ HIGH EFFICIENCY, LOW EMISSIONS
- ✓ THERMOSTATIC FAN CONTROL



CAPACITY
330m²



LOG LENGTH
410mm



FLUE SIZE
150mm



EFFICIENCY
76%+








EMISSIONS
1.3 g/kg


JINDARA WOODHEATING

PLATINUM SERIES - INSERT

TILGA

	CAPACITY 240m ²
	LOG LENGTH 410mm
	FLUE SIZE 150mm
	EFFICIENCY 74%+
	EMISSIONS 1.0 g/kg

GRANGE

	CAPACITY 300m ²
	LOG LENGTH 410mm
	FLUE SIZE 150mm
	EFFICIENCY 68%+
	EMISSIONS 1.4 g/kg

- ✓ SLEEK & MODERN DESIGN
- ✓ 3-SPEED FAN
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ DUAL PRE-HEATED PRIMARY AIR
- ✓ DUAL-ACTION HANDLE LATCH
- ✓ THERMOSTATIC FAN CONTROL



MASONRY INSERT - FASCIA DEPTH 16mm

ZERO CLEARANCE INSERT - FASCIA DEPTH 3mm (FLUSH FIT)

THE JINDARA DIFFERENCE


REMOVABLE 8mm
STEEL BAFFLE PLATE

HEAT SHIELD CASING TO
ENSURE MAXIMUM FAN
AIR CONVECTION

TOUGHENED 5mm
CERAMIC GLASS

CAST IRON
LINERS ENSURE
MAXIMUM HEAT
EFFICIENCY

MODERN
MANUFACTURING
TECHNIQUES
ENSURE THAT
THE INTEGRITY
& STRENGTH OF
THE FIREBOX IS
PRESERVED

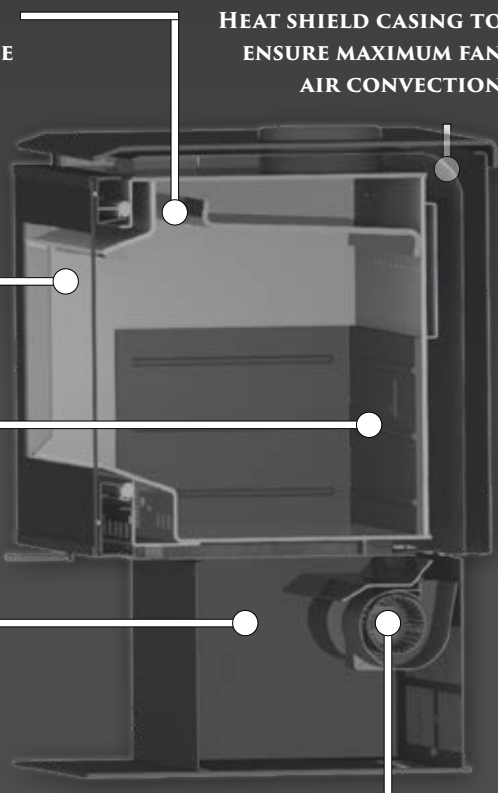

FINAL COMBUSTION PROCESS

SECONDARY
COMBUSTION AIR
INJECTION


AIR
WASH
OVER
GLASS

RADIANT
HEAT

PRE-HEATED
PRIMARY
AIR INLET

CONVECTION HEAT
(FAN FORCED)

PRIMARY
COMBUSTION
AIR CYCLE

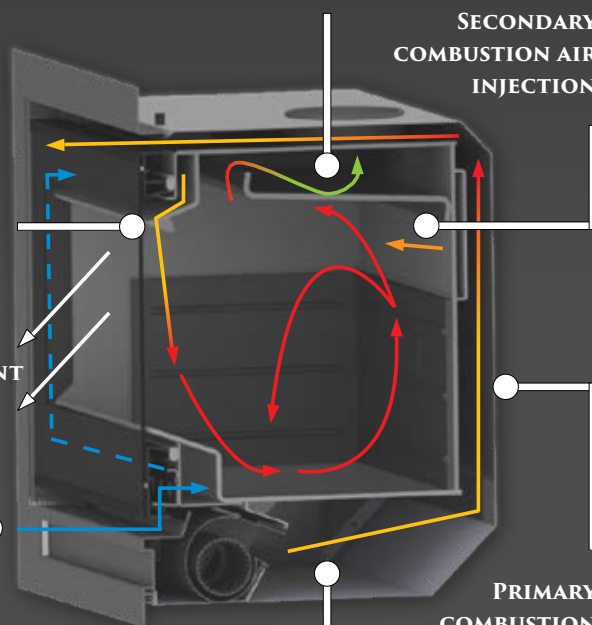

POWERFUL 3-SPEED FAN FOR EFFECTIVE AIR CIRCULATION

JINDARA WOODHEATING

DUAL-DOOR RANGE



DUO

- ✓ 2x 3-SPEED FANS
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ THROUGH-WALL INSTALL & MASONRY CAVITY INSTALL

OPTIONS



EFFICIENCY
67%+



EMISSIONS
2.4 g/kg



CAPACITY
280m²



LOG LENGTH
710mm



FLUE SIZE
150mm



OUTPUT
16kW±



DUPLICITY

- ✓ 2x 3-SPEED FANS
- ✓ FIREBRICK LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ THROUGH-WALL INSTALL & MASONRY CAVITY INSTALL

OPTIONS



EFFICIENCY
67%+



EMISSIONS
1.4 g/kg



CAPACITY
400m²



LOG LENGTH
670mm



FLUE SIZE
175mm



OUTPUT
24kW±



SPECTRE FREESTANDING

- ✓ 2x 3-SPEED FANS
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ DUAL-ACTION HANDLE LATCH
- ✓ THERMOSTATIC FAN CONTROL
- ✓ THROUGH-WALL OPTIONS AVAILABLE



EFFICIENCY
62%+



EMISSIONS
1.2 g/kg



CAPACITY
420m²



LOG LENGTH
530mm



FLUE SIZE
175mm



OUTPUT
25+ kW±

JINDARA WOODHEATING

DUAL-DOOR RANGE



SPECTRE INSERT

- ✓ 2x 3-SPEED FANS
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ DUAL-ACTION HANDLE LATCH
- ✓ THERMOSTATIC FAN CONTROL
- ✓ MASONRY INSTALLATION ONLY



CAPACITY
400m²



LOG LENGTH
530mm



FLUE SIZE
175mm




OUTPUT
25+ kW[‡]



EFFICIENCY
62%⁺



EMISSIONS
1.2 g/kg

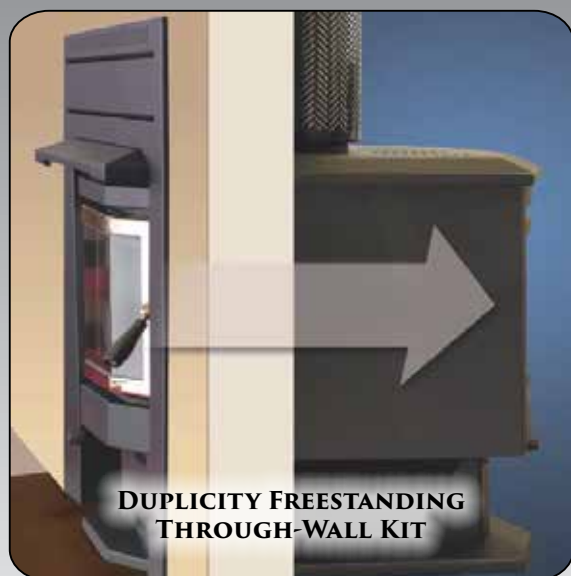

Contact your Jindara dealer for further information & specifications on double-sided / through-wall installations



SPECTRE MODULAR

- ✓ 2x 3-SPEED FANS
- ✓ CAST IRON LINED
- ✓ 8mm STEEL BAFFLE PLATE
- ✓ 10 YEAR FIREBOX WARRANTY
- ✓ DUAL-ACTION HANDLE LATCH
- ✓ THERMOSTATIC FAN CONTROL
- ✓ 1200mm BENCH OPTION



CAPACITY
420m²



LOG LENGTH
530mm



FLUE SIZE
175mm



OUTPUT
25+ kW[‡]



EFFICIENCY
62%⁺




EMISSIONS
1.2 g/kg

Contact your Jindara dealer for further information & specifications on double-sided / through-wall installations

JINDARA WOODHEATING

ZERO CLEARANCE & ELEVATED INSTALLATION


ZERO CLEARANCE INSTALLATION

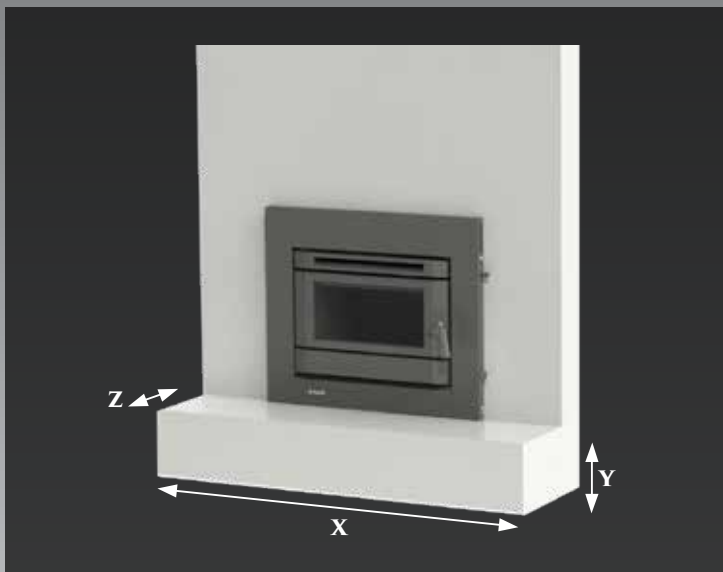

Non-combustible material on front face of framing

Triple skin flue

Timber Framing

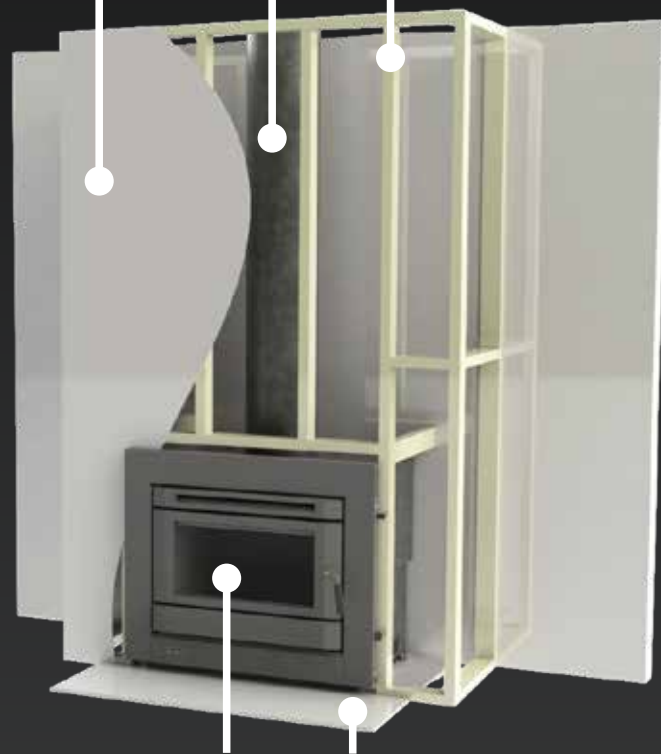

Jindara Insert
woodheater
of your choice

Non-combustible hearth
Must extend underneath
Zero Clearance Cabinet

ELEVATED INSTALLATION


A MINIMUM HEARTH DEPTH OF 300MM CAN BE ACHIEVED BY RAISING THE WOODHEATER. USE THE FOLLOWING TABLE FOR REFERENCE (RAISED STEP TO BE NON-COMBUSTIBLE):

	REF	RIVERINA		BAROSSA		BARWON		TILGA		GRANGE	
HEARTH WIDTH	X	890mm (min.)		950mm (min.)		1280mm (min.)		945mm (min.)		1000mm (min.)	
HEARTH RAISED	Y	0mm	155mm (min.)	0mm	132mm (min.)	0mm	172mm (min.)	0mm	175mm (min.)	0mm	140mm (min.)
HEARTH DEPTH FROM FRONT OF FASCIA	Z	530mm (min.)	300mm (min.)	510mm (min.)	300mm (min.)	585mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)


JINDARA WOODHEATING

SPECIFICATIONS

FREESTANDING



MODULAR



FREESTANDING MODELS

Dimensions & Clearances	Flue Type	Overall Dimensions Width/Height/Depth			Back of Woodheater to Flue Centre	Clearance to Combustibles			Minimum Hearth Size Width/Depth/Thickness			
		W	H	D		Rear	Side	Corner	W	D	T	mm in front of unit
Riverina	Perforated	650	800	508	180	125*	325	150	890	960	12	400
Barossa	Perforated	710	937	570	180	150*	400	175	950	1050	18	400
Barwon	Perforated	782	1008	570	180	150*	450	200	1020	1100	20	650
Sorrento	Perforated	655	745	610	170	150	450	125	900	1070	4.5	300
Pyrenees	Perforated	775	795	595	165	100	330	50	1170	1020	4	300
Mallee	Perforated	850	825	620	180	100	350	50	975	1070	7.5	400
Sturt	Perforated	610	660	650	175	50	550	170	770	910	9	300
Cottage	Perforated	650	865	560	110	175	350	200	890	1095	12	350
Homestead	Perforated	660	870	508	180	175	400	225	890	985	6	350
Pilbara	Perforated	580	700	480	180	150	300	100	890	995	12	400
Kimberley	Perforated	707	760	570	185	100	250	25	940	940	9	300
Hamersley	Perforated	770	787	570	200	150	325	100	1020	1190	12	500
Tilga	Sol. / Perf.	690	765	548	205	155/50*	325	50/75	945	1000/895	9	300
Grange	Sol. / Perf.	748	828	548	205	50*	325	50	1000	895	9	300
Duo	Perforated	680	700	815	N/A	N/A	275	N/A	900	1750	6	500
Duplicity	Perforated	810	792	810	N/A	N/A	350	N/A	1000	1800	12	500
Spectre	Sol. / Perf.	695	765	745	N/A	N/A	330	N/A	940	1590	6	460


MODULAR MODELS

Dimensions & Clearances	Flue Type	Overall Dimensions Width/Height/Depth			Back of Woodheater to Flue Centre	Clearance to Combustibles			Minimum Hearth Size Width/Depth/Thickness			
		W	H	D		Rear	Side	Corner	W	D	T	mm in front of unit
Tilga	Sol. / Perf.	690	635	548	205	155/50*	325	50/75	945	1005/900	140	330
Grange	Sol. / Perf.	748	676	548	205	50*	325	50	1000	895	140	330
Spectre	Sol. / Perf.	695	653	745	N/A	N/A	475	N/A	940	1890	32	570
Tilga Bench	Sol. / Perf.	690	635	548	205	155/50*	325	50/75	945	1005/900	9	300#
Grange Bench	Sol. / Perf.	748	676	548	205	50*	325	50	1000	895	9	300#
Spectre Bench	Sol. / Perf.	695	653	745	N/A	N/A	475	N/A	940	1375	6	300#

* Standard flue shield kit must be installed to achieve rear wall clearance (included in woodheater). # In front of bench.

JINDARA WOODHEATING

SPECIFICATIONS

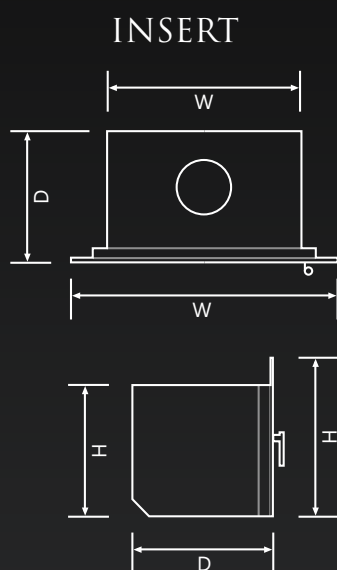

INSERT MODELS

Dimensions & Clearances	Overall Dimensions Width/Height/Depth			Rear Casing Dimensions			Clearance to Combustibles From Base of Appliance			Minimum Hearth Size				Back of Fascia to Flue Centre
										Masonry Installation		ZCC Install		
	W	H	Fascia Depth	W	H	D	Side	To Mantle Shelf	To Breast Plate	W	D	T	mm in front of unit	mm
Riverina	882	750	42	570	595	365	50	1100	1040	890	530*	12	570**	232
Barossa	922	758	42	631	635	430	50	1390	1340	950	510*	12	550**	296
Barwon	994	828	42	700	706	430	40	1710	1560	1280	585*	25	625**	295
Kimberley	950	740	65	605	600	440	25	1170	1080	940	550*	18	610**	290
Hamersley	1010	750	105	665	630	430	150	1225	975	1000	600*	18	705**	257
Federation	1028	730	60	665	630	475	150	1225	975	1000	600*	18	660**	300
Tilga Masonry	855	640	16	751	595	484	55	1500*	1410	945	550*	18	550**	326
Tilga ZC	850	674	3	N/A	N/A	N/A	55	1500*	1410	945	N/A	18	550**	N/A
Grange Masonry	935	705	16	808	651	484	35	1500*	1410	1000	520*	18	520**	326
Grange ZC	930	736	3	N/A	N/A	N/A	35	1500*	1410	1000	N/A	18	520**	N/A
Spectre	875	692	16	751	644	708	205	1127	1127	940	1890*	32	570**	354

‡ Mantle deflector required, refer to the relevant installation instructions.

Note: The dimensions and clearances are for reference only. Refer to the Owner's Manual for operation and exact specifications prior to installation. Colours of woodheaters shown are as close as four colour process printing methods allow. Zero clearance options are available for all Insert models, consult your local dealer for further information. Installation should be carried out by a qualified installer. Flue kits to be installed strictly in accordance with AS/NZS 2918. All fireplace Inserts must be installed in a brick masonry chimney or Jindara Zero Clearance Cabinet and be fully flued. Jindara woodheaters conform to AS/NZS 2918, AS/NZS 4012/4013, however Jindara accepts no liability whatsoever for interpretation. All heating capacities quoted are based on units tested with quality hardwood. Performance reduction may result due to large glassed areas, vaulted ceilings, drafts or insufficient insulation. Jindara Woodheating reserves the right to change specifications without notice. All dimensions and clearances are in millimetres (mm). † Peak efficiency % quoted. * kW output is peak power. * Minimum hearth depth in front of unit can be reduced by raising appliance above combustible materials (consult your local dealer or page 14 of this brochure). ‡ The hearth must be installed beneath and in front of Zero Clearance Cabinet (ZCC), refer to owners manual for exact specifications.



AF Gason Pty Ltd
Phone: 03 9763 3200
Fax: 03 9763 0836
jindara@gason.com.au
www.jindara.com.au

Your Local Jindara Dealer

