







All of our heaters are built to last. That's why we guarantee all of our fireboxes to last 10 years*.

*Excludes Jindara Cottage

Classic Australian wood heaters with world-class performance



Immerse yourself in the dynamic range of Jindara woodheaters. Proudly crafted over four generations in country Victoria.

Freestanding Woodheaters

Outback Series	4
Radiant Series	7
Paramount Series	12
Platinum Series	14
Insert Woodheaters	
Outback Series	16
Paramount Series	17
Platinum Series	18
Double Sided Range	
Double Sided Range	20
Zero Clearance Installation	22
Elevated Insert Installations	22
Specifications	23



Freestanding Outback Series

With clever design features and Jindara's pre-heated primary air technology, the freestanding Outback Series is certain to impress. Loading firewood has never been easier, with the flat-window models encompassing a tall ergonomic pedestal. Should you simply wish to be absorbed by the flickering flames, the elegant bay window models will provide a stunning view.



- ① 3-Speed fan
- Firebrick lined
- ① 8mm steel baffle plate
- ① Tall pedestal for easy loading
- ① 10 Year firebox warranty

Riverina 180

	0=-	
Capacity 180m²	Log Width 490mm	Flue Size
Efficiency 69%†	Emissions 0.9g/kg	Output 14kW‡

Barossa 260

Capacity 260m ²	Log Width 545mm	Flue Size
Efficiency	Emissions	Output
72%†	1.4g/kg	21kW‡

Barwon 320

	<u></u>	
Capacity	Log Width	Flue Size
320m²	620mm	175mm
Efficiency 65%†	Emissions 1.3g/kg	Output 24kW‡





- ① 3-Speed fan
- ① Firebrick lined
- ① 8mm steel baffle plate
- ① Dual pre-heated primary air
- ① Cool-touch casing
- ① 10 Year firebox warranty

Sorrento 220

	<u></u>	
Capacity	Log Width	Flue Size
220m²	565mm	150mm
Efficiency 73%†	Emissions 1.0g/kg	Output 15kW‡

Pyrenees 300

	<u> </u>	
Capacity	Log Width	Flue Size
300m²	630mm	150mm
Efficiency	Emissions	Output
65%†	1.3g/kg	17kW‡

Mallee 350

Log Width	Flue Size
630mm	175mm
Emissions 0.9g/kg	Output 20kW‡
	Emissions

Freestanding Woodheaters



Freestanding Radiant Series

Sure to become a design icon — the new, sleek and modern Jindara Radiant series provides all the benefits of radiant style wood heating. Perfect for homes with poor insulation or high ceilings, Radiant heaters emit heat directly through the outer surface of the firebox, rapidly warming your space.



Townsend

Franklin

160

COMING MARCH 2020 efer to www.iindara.com.au

Refer to www.jindara.com.au for updates & specifications


- Firebrick lined
- ① Dual baffle system featuring 8mm primary baffle
- (+) "Boost Air" inlet for easier ignition
- Heavy duty cast iron door
- 10 Year firebox warranty

Townsend 240

	O	
Capacity	Log Width	Flue Size
240m²	535mm	150mm
Efficiency 68%†	Emissions 0.9g/kg	Output 12kW‡

Gawler 320

	<u></u>	
Capacity	Log Width	Flue Size
320m ²	570mm	150mm
Efficiency 66%†	Emissions 1.0g/kg	Output 14kW‡

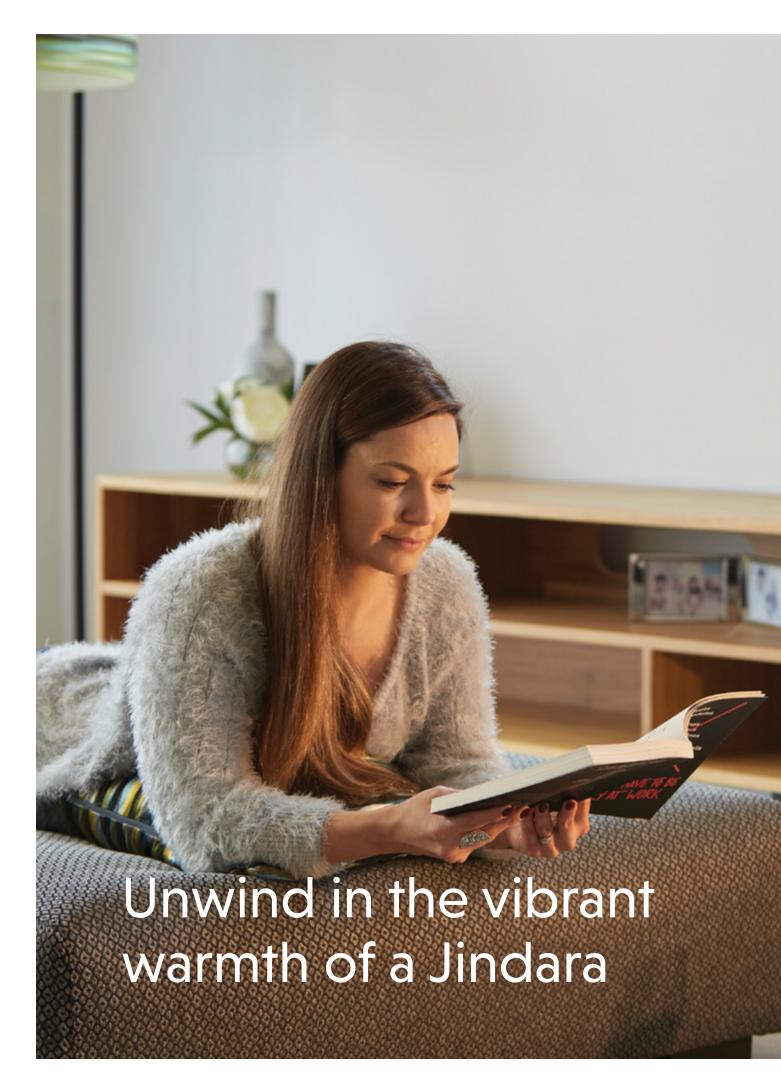





Freestanding Woodheaters



Sturt

The Jindara Sturt is known all around Australia for its functionality and hardworking nature. This tough as nails radiant style unit has an exceptionally deep firebox, allowing you to fit logs that similar sized units would be envious of. The Sturt also incorporates a radiant cook top for your pots and pans, as well as a raised shelf for simmering. The Jindara Sturt truly is a tireless contributor to any Aussie home.

- Boil & simmer on top
 or back shelf
- Firebrick lined
- Extra deep firebox for easy loading
- 10 Year firebox warranty
- ① Optional 3-speed fan

	E	
Capacity	Log Width	Flue Size
180m²	485mm	150mm
Efficiency 69%†	Emissions 1.1g/kg	Output 16kW‡



Cottage

The Jindara's Cottage hot plate gives the versatility of stove top cooking, whilst the functional oven roasts or bakes your favourite winter treats. The firebox itself provides a radiant heating capacity of up to $120m^2$, making the Cottage a superb addition to your kitchen or family room whatever the season.

- Hot plate for boiling/ simmering
- ① Oven for baking
- + Firebrick lined
- ① 8mm steel baffle plate

(A)		
Capacity	Log Width	Flue Size
120m²	490mm	150mm
Efficiency	Emissions	Output
N/A	N/A	N/A



Homestead

The Jindara Homestead makes your wood storage simple, providing you with ample space to store your logs for those next few burns. Whilst utilising the same firebox as the Jindara Riverina, the Homestead has the added benefit of being easier to load, as it is taller in size.

- ① 3-Speed fan
- Firebrick lined
- + 8mm steel baffle plate
- ① Large wood storage box
- Tall unit for easy loading
- (Identical firebox to Riverina
- 10 Year firebox Warranty

Capacity	Log Width	Flue Size
180m²	490mm	150mm
Efficiency 69%†	Emissions 0.9g/kg	Output 14kW‡

Freestanding Paramount Series

The ultra-reliable Paramount series range has been the cornerstone of Jindara Woodheating for years – and it's not hard to see why. These cast-iron lined heaters have been warming Australian homes through the depths of winter for generations, without a hint of fuss.






- ① 3-Speed fan
- + Cast iron lined
- + 8mm steel baffle plate
- 10 Year firebox warranty
- Minimal clearances

Kimberley 240

	O =-3	
Capacity	Log Width	Flue Size
240m²	515mm	150mm
Efficiency 69%†	Emissions 1.0g/kg	Output 13kW‡

Hamersley 300

	0=-3	
Capacity	Log Width	Flue Size
300m ²	570mm	150mm
Efficiency	Emissions	Output
69%†	1.2g/kg	16kW‡

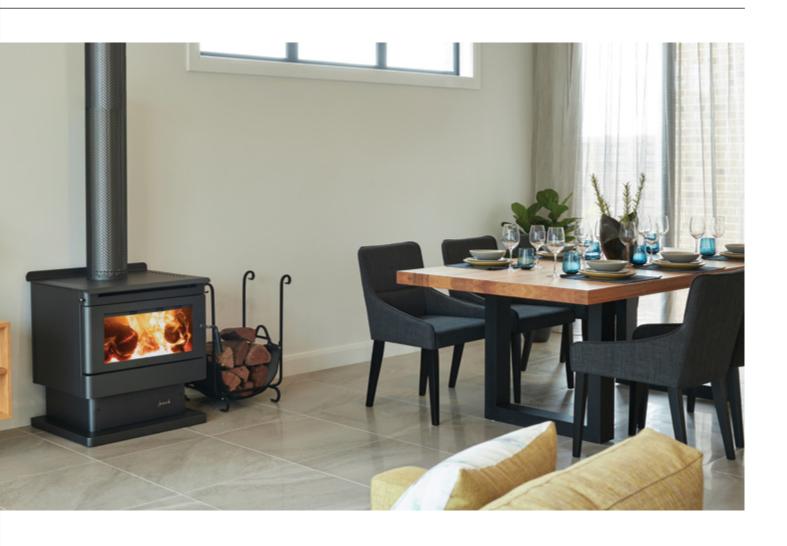



Freestanding Platinum Series

Why compromise between classic and modern style! The Platinum Series range is perfect for those looking to invest in a striking centre piece for their home, guaranteeing dependable heat for many winters to come.



- Sleek & modern design
- 3-Speed fan with thermostatic switch
- ① Cast iron lined
- ① 8mm steel baffle plate
- 10 Year firebox warranty
- ① Dual pre-heated primary air
- Dual-action handle latch

Tilga Freestanding 260

Grange Freestanding 330

	E	
Capacity	Log Width	Flue Size
260m²	540mm	150mm
Efficiency 80%†	Emissions 0.9g/kg	Output 16kW‡

	<u></u>	
Capacity 330m²	Log Width 595mm	Flue Size
Efficiency 76%†	Emissions 1.3g/kg	Output 17kW‡





- ① Sleek & modern design
- ① 1200mm bench option
- ① 3-Speed fan with thermostatic switch
- ① Cast iron lined
- ① 8mm steel baffle plate
- ① 10 Year firebox warranty
- ① Dual pre-heated primary air
- ① Dual-action handle latch

Tilga Modular 260

Grange Modular 330

	0=	
Capacity	Log Width	Flue Size
260m²	540mm	150mm
Efficiency 80%†	Emissions 0.9g/kg	Output 16kW‡

	0=-=	
Capacity 330m²	Log Width 595mm	Flue Size
Efficiency 76%†	Emissions 1.3g/kg	Output 17kW‡

Insert

Outback Series

Turn a draughty open fireplace into a highly efficient heat source! Designed with functionality, efficiency and durability in mind, the Outback series inbuilt range will keep you warm through the coldest, darkest winters.



- ① 3-Speed fan
- + Firebrick lined
- ① 8mm steel baffle plate
- ① 10 Year firebox warranty
- ① Zero clearance compatible

Riverina 160

	<u></u>	
Capacity 160m²	Log Width 490mm	Flue Size
Efficiency 72%†	Emissions 0.9g/kg	Output 14kW‡

Barossa 240

	<u> </u>	
Capacity	Log Width	Flue Size
240m²	545mm	150mm
Efficiency 67%†	Emissions 1.5g/kg	Output 17kW‡

Barwon 280

	<u> </u>	
Capacity	Log Width	Flue Size
280m²	620mm	175mm
Efficiency	Emissions	Output
65%†	1.4g/kg	21kW‡



Insert

Paramount Series

The Paramount Series has been the cornerstone of Jindara Woodheating for many years and for good reason. These cast-iron lined woodheaters with a simple traditional design can be trusted to keep your home warm on even the coldest of winter nights, year after year.



- ① 3-Speed fan
- ① Cast iron lined
- ① 8mm steel baffle plate
- 10 Year firebox warranty
- ① Zero clearance compatible

Kimberley 220

	<u></u>	
Capacity	Log Width	Flue Size
220m²	515mm	150mm
Efficiency	Emissions	Output
65%†	0.3g/kg	12kW‡

Hamersley 260

	<u></u>	
Capacity	Log Width	Flue Size
260m ²	570mm	150mm
Efficiency	Emissions	Output
64%†	1.0g/kg	15kW‡

Federation



- ① 3-Speed fan
- ① Cast iron lined
- ① 8mm steel baffle plate
- 10 Year firebox warranty
- Alloy fascia & timber mantle option (pictured, left)
- ① Zero clearance compatible



Insert

Platinum Series

The apex of Australian wood heating! This visually striking series offers the very best of Jindara design, functionality and endeavour. Their narrow fascia's allow the heater to sit neatly within your wall or fireplace. Take comfort as the warmth is generously distributed throughout your home.



- ① Sleek & modern design
- 3-Speed fan with thermostatic switch
- ① Cast iron lined
- ① 8mm steel baffle plate
- 10 Year firebox warranty
- ① Dual pre-heated primary air
- ① Dual-action handle latch
- Zero Clearance option features
 "flush-fit" fascia (3mm)


Tilga 240 Capacity Log Width Flue Size
240m² 540mm 150mm

Efficiency Emissions Output
74%† 1.0g/kg 12kW‡

Grange 300

Capacity	Log Width	Flue Size
300m²	585mm	150mm
Efficiency 68%†	Emissions 1.4g/kg	Output 15kW‡



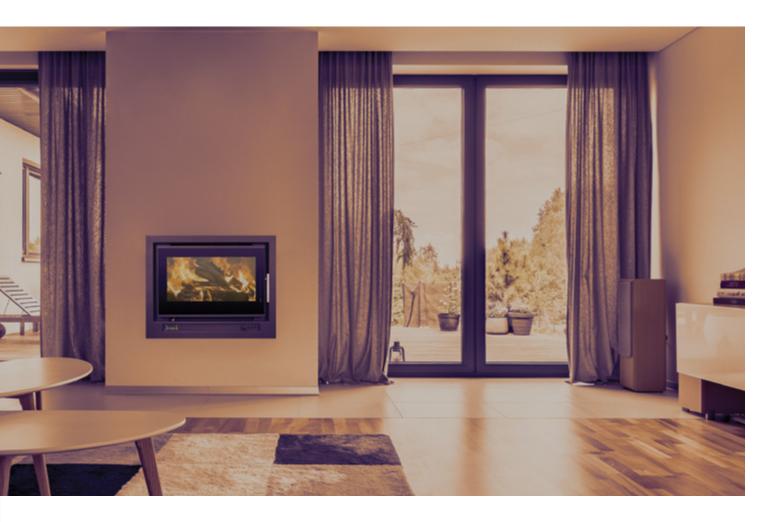



Double Sided Range

These heaters truly provide a heart for any home. Whether you're looking for a powerful heating source, a luxurious centrepiece, or the flamed vitality of a wood burning heater — this range gives incredible flexibility and warmth in multiple rooms (capable of heating up to 420m²).

For further double sided range installation options, such as dual room functionality, speak to your local dealer, or download the Double Sided Reference guide at www.jindara.com.au



*Gold door optional

Duplicity 400

- ① 2x 3-speed fans
- (†) Firebrick lined
- + 8mm steel baffle plate
- 10 Year firebox warranty
- Through-wall & Masonry cavity options available

Capacity	Log Width	Flue Size
400m²	670mm	175mm
Efficiency	Emissions	Output
67%†	1.4g/kg	24kW‡



Spectre 420 (Freestanding)

- ① 2x 3-speed fans with thermostatic switch
- + Cast iron lined
- ① 8mm steel baffle plate
- 10 Year firebox warranty
- ① Dual-action handle latch
- ① Dual pre-heated primary air
- Through-wall options available

Efficiency 62%†	Emissions 1.2g/kg	Output 25+kW‡
420m²	585mm	175mm
Capacity	Log Width	Flue Size





Spectre 400 (Insert)

- ① 2x 3-speed fans with thermostatic switch
- ① Cast iron lined
- ① 8mm steel baffle plate
- 10 Year firebox warranty
- ① Dual-action handle latch
- ① Dual pre-heated primary air
- Masonry installation only

Capacity	Log Width	Flue Size
400m ²	530mm	175mm
Efficiency	Emissions	Output
62%†	1.2g/kg	25+kW‡



Spectre 420 (Modular)


- ① 2x 3-speed fans with thermostatic switch
- ① Cast iron lined
- ① 8mm steel baffle plate
- ① 10 Year firebox warranty
- Dual-action handle latch
- ① Dual pre-heated primary air
- 1200mm bench option

Efficiency 62%†	Emissions 1.2g/kg	Output 25+kW‡
420m²	530mm	175mm
Capacity	Log Width	Flue Size

Zero Clearance Installation

Don't have a brick chimney, but love the sleek look of a Jindara Insert? All of the Jindara Inserts (exc. double sided range) are Zero Clearance Install compatible using the relevant Jindara Zero Clearance Cabinet. This allows for a broader range of ways to incorporate a Jindara Insert heater into your living space.

Step 1



Step 2



Step 3



Minimum Zero Clearance Framing Dimensions

Model	Н	W	D
Riverina, Barossa	810	916	565
Kimberley, Hamersley, Federation	1063	1036	595
Barwon	868	1035	570
Tilga	1000	915	635
Grange	1000	1055	610


Specifications detail minimum framework opening (inclusive of clearance from Zero Box to combustible framework)

A Zero Clearance Cabinet allows for safe installation into timber framework with minimal clearances to the unit. Once your framework is built, it is as simple as cladding the front face with a cement sheet or equivalent, and your Jindara Insert heater is safely installed as a focal point to your room.


Minimum framing dimensions are an indicative guide only. **DO NOT** begin any construction prior to consulting the full Zero Clearance Installation guide for the relevant unit. Full Installation instructions available at www.jindara.com.au


Elevated Insert Installations

Raising your Jindara Insert installation above floor level? You may be able to reduce your minimum hearth depth to 300mm. Refer to the following table as a guide on how high your unit must be raised to achieve the reduced hearth depth.



	REF	RIVE	RINA	IINA BAROSSA		BARWON		KIMBERLEY		HAMERSLEY/ FEDERATION		TILGA		GRANGE	
Hearth width	x	890mn	n (min.)	950mn	950mm (min.)		m (min.)	940mm (min.)		1000mm (min.)		945mm (min.)		1000mm (min.)	
Hearth raised	Y	0mm	155mm (min.)	0mm	132mm (min.)	0mm	197mm (min.)	0mm	175mm (min.)	0mm	205mm (min.)	0mm	175mm (min.)	0mm	140mm (min.)
Hearth depth from front of fascia	Z	530mm (min.)	300mm (min.)	510mm (min.)	300mm (min.)	610mm (min.)	300mm (min.)	550mm (min.)	300mm (min.)	600mm (min.)	300mm (min.)	520mm (min.)	300mm (min.)	550mm (min.)	300mm (min.)







Freestanding Specifications

Dimensions & clearances	Flue type		all dimer /height/		Back of Woodheater to Flue Centre		Clearance Combusti		Minimum hearth size width/depth/thickness					
Freestanding models	Solid / perforated	w	н	D	mm	Rear	Side	Corner	w	D	Т	mm in front of unit		
Franklin Franklin	Perforated Half Shield			cc	DMING MARCH 2020 -	Refer to ww	w.jindara	.com.au for up	dates 8	specification	ns			
Townsend	Perforated	640	730	502	176	250*	750	500 / 350**	820	1060	24	550		
Townsend	Half Shield	640	730	502	176	300	825	475 / 300**	820	1060	24	550		
Gawler	Perforated	675	770	557	196	200*	825	550 / 425**	820	1140	30	600		
Gawler	Half Shield	675	770	557	196	350	900	575 / 475**	820	1140	30	600		
Riverina	Perforated	650	800	508	180	125*	325	150	890	960	12	400		
Barossa	Perforated	710	937	570	180	150*	400	175	950	1050	18	400		
Barwon	Perforated	782	1008	570	180	150*	450	200	1020	1100	20	450		
Sorrento	Perforated	655	745	610	170	150	450	125	900	1070	4.5	300		
Pyrenees	Perforated	775	795	595	165	100	330	50	1170	1020	4	300		
Mallee	Perforated	850	825	620	180	100*	425	100	960	1075	6	450		
Sturt	Perforated	610	660	650	175	50	550	170	770	910	9	300		
Cottage	Perforated	650	865	560	110	175	350	200	890	1095	12	350		
Homestead	Perforated	660	870	508	180	175	400	225	890	985	6	350		
Kimberley	Perforated	707	760	570	185	100	250	25	940	940	9	300		
Kimberley	Half Shield	707	760	570	185	150	425	150	940	940	9	300		
Hamersley	Perforated	770	787	570	200	100*	450	50	1000	1100	24	530		
Hamersley	Half Shield	770	787	570	200	125	475	225	1000	1090	24	520		
Tilga	Solid/Perforated	690	765	548	205	155/50*	325	50/75	945	1000/895	9	300		
Grange	Solid/Perforated	748	828	548	205	50*	325	50	1000	895	9	300		
Duplicity	Perforated	810	792	810	N/A	N/A	350	N/A	1000	1800	12	500		
Spectre	Solid/Perforated	695	765	745	N/A	N/A	330	N/A	940	1590	6	460		

^{*}Standard flue shield kit must be installed to achieve minimum rear wall clearance (included in woodheaters, excluding Franklin, Townsend, Gawler)
**Requires additional side wing heat shields to achieve minimum corner clearance (purchased separately)







Modular Specifications

Dimensions & clearances	Flue type	Overall dimensions width/height/depth			Back of Woodheater to Flue Centre		earance t mbustibl		Minimum hearth size width/depth/thickness				
Modular models	Solid / perforated	w	н	D	mm	Rear	Side	Corner	w	D	Т	mm in front of unit	
Tilga	Solid/Perforated	690	635	548	205	155/50*	325	50/75	945	1005/900	140	330	
Grange	Solid/Perforated	748	676	548	205	50*	325	50	1000	895	140	330	
Spectre	Solid/Perforated	695	653	745	N/A	N/A	475	N/A	940	1890	32	570	
Tilga w/ Bench	Solid/Perforated	690	635	548	205	155/50*	325	50/75	945	1005/900	9	330	
Grange w/ Bench	Solid/Perforated	748	676	548	205	50*	325	50	1000	895	9	330	
Spectre w/ Bench	Solid/Perforated	695	653	745	N/A	N/A	475	N/A	940	1375	6	330	
Tilga/Grange Bench	-	1200	280	550	-	-	_	-	-	_	_	_	
Spectre Bench	-	1200	280	775	-	-	_	-	-	_	_	_	

^{*}Standard flue shield kit must be installed to achieve rear wall clearance (included in woodheater)





Insert Specifications

Dimensions & clearances	Overall dimensions width/height/depth				Rear casin dimensior	•		ince to comb m base of ap		Mac	Minimu	Back of fascia to flue centre		
Insert Models	w	Н	Fascia Depth	w	Н	D	Side	To Mantle Shelf	To Breast Plate	W	D	T	ZCC install mm in front of ZCB***	mm
Riverina	882	750	42	570	595	365	50	1100	1040	890	530*	12	570*	232
Barossa	922	758	42	631	635	430	50	1390	1340	950	510*	12	550*	296
Barwon	994	828	42	700	706	430	50	1545	1545	1035	610*	18	650*	295
Kimberley	950	740	65	605	600	440	25	1170	1080	940	550*	18	610*	290
Hamersley	1010	750	105	665	630	430	150	1225	975	1000	600*	18	705*	257
Federation	1028	730	60	665	630	475	150	1225	975	1000	600*	18	660*	300
Tilga Masonry	855	640	16	751	595	484	55	1500**	1410	945	550*	18	550*	326
Tilga ZC	850	674	3	Refer to	o ZC Insta	ll Guide	55	1500**	1410	945	N/A	18	550*	N/A
Grange Masonry	935	705	16	808	651	484	35	1500**	1410	1000	520*	18	520*	326
Grange ZC	930	736	3	Refer to	o ZC Insta	ll Guide	35	1500**	1410	1000	N/A	18	520*	N/A
Spectre	875	692	16	751	644	708	205	1127	1127	940	1890*	32	570*	354

- * Minimum hearth depth in front of unit can be reduced by raising the appliance above combustible materials (Consult your local dealer and/or page 22 of this brochure)
- ** Mantle deflector required to achieve mantle clearance (included with woodheater)
- $\ensuremath{^{\star\star\star}}$ Hearth must also be installed beneath ZCC refer to install guide for exact specifications

Notes: ‡ All KW Outputs quoted are Peak Power. † All Efficiencies quoted are Peak Efficiency %. All dimensions are in mm. Dimensions and clearances shown are for reference only. Refer to the Owner's Manual for exact specifications prior to installation.

All information in this brochure was correct at the time of printing, February 2020, however Jindara Woodheating reserves the right to change specifications without notice. Colours shown are as close as printing method allow. Installation should be carried out by a qualified installer. All fireplace inserts must be installed into a masonry chimney or Jindara Zero Clearance Cabinet, and be fully flued.



Your local Jindara dealer







