




CHARACTERISTICS

- Carbon Steel Free Standing
- 604 (H) x 426(D) x 380 (W)
- Black Vermiculite Interior Panels
- Large Wood Capacity for its Size!
- Optimal Combustion
- Anti-Stain Glass
- **Rear Clearance 50mm***
- 125 mm Flue Connection
- Heat Output: 4.3 KW.h
- Efficiency 67%
- Emissions 0.8


*** Impressive Rear Clearance!**

SPECIFICATIONS

CLEARANCE

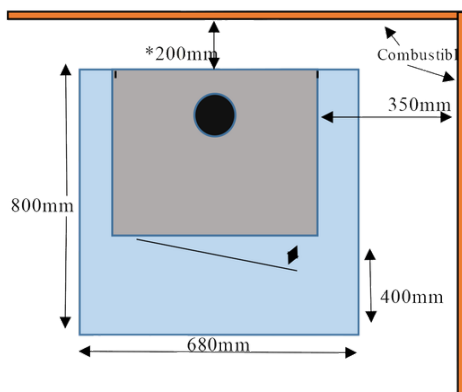

*The rear wall clearance can be reduced to 50mm from a combustible wall with the addition of a minimum of 450mm high, 0.75mm thick, 180 degree reflective stainless steel rear flue heat shield with a 25mm air gap from active flue pipe.

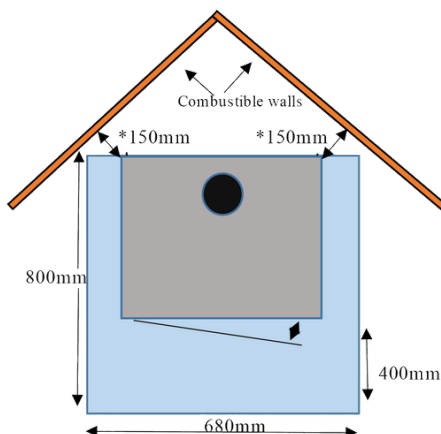

*The corner clearance on both walls can be reduced to 50mm from the appliance rear corners with the addition of a minimum of 450mm high, 0.75mm thick, 180 degree reflective stainless steel rear flue heat shield with a 25mm air gap from active flue pipe.

TECHNICAL

